



# HOMAPAL® METAL DECORS

## TECHNICAL DATA SHEET

### ALU POLISHED CELLA



	470/966 Alu Polished Cella Natural	471/966 Alu Polished Cella Goldtone	473/966 Alu Polished Cella Tea	474/966 Alu Polished Cella Smokey Grey	477/966 Alu Polished Cella Coppertone
<b>Size</b> a: 2440 x 1220 mm b: 3050 x 1220 mm	a	a	a	a	a
<b>Thickness</b>	1,3	1,3	1,3	1,3	1,3
<b>Weight [kg/m²]</b>	1,8	1,8	1,8	1,8	1,8
<b>Surface</b> Material: Finish:	Aluminium Anodized	Aluminium Anodized	Aluminium Anodized	Aluminium Anodized	Aluminium Anodized
<b>Balancing</b>	005/015	005/015	005/015	005/015	005/015
<b>Tolerances</b> Thickness: Length: Width: Flatness:	±0,15 mm +100 mm/ -0 mm +100 mm/ -0 mm ≤ 100 mm/m	±0,15 mm +100 mm/ -0 mm +100 mm/ -0 mm ≤ 100 mm/m	±0,15 mm +100 mm/ -0 mm +100 mm/ -0 mm ≤ 100 mm/m	±0,15 mm +100 mm/ -0 mm +100 mm/ -0 mm ≤ 100 mm/m	±0,15 mm +100 mm/ -0 mm +100 mm/ -0 mm ≤ 100 mm/m
<b>Postforming</b>	not possible	not possible	not possible	not possible	not possible
<b>Processing</b>	at max. temperature of 60° C and max. pressure of 0,1 N/ mm²	at max. temperature of 60° C and max. pressure of 0,1 N/ mm²	at max. temperature of 60° C and max. pressure of 0,1 N/ mm²	at max. temperature of 60° C and max. pressure of 0,1 N/ mm²	at max. temperature of 60° C and max. pressure of 0,1 N/ mm²
<b>Max. Temperature in use</b>	80° C (short-term)	80° C (short-term)	80° C (short-term)	80° C (short-term)	80° C (short-term)
<b>Health</b>	harmless	harmless	harmless	harmless	harmless
<b>Rollable</b>	yes	yes	yes	yes	yes
<b>Bending Radius*</b>	Product group 4	Product group 4	Product group 4	Product group 4	Product group 4

\* see separate Datasheet

# HOMAPAL® METAL DECORS

## TECHNICAL DATA SHEET

### ALU POLISHED CELLA




470/966  
Alu Polished  
Cella Natural



471/966  
Alu Polished  
Cella Goldtone



473/966  
Alu Polished  
Cella Tea



474/966  
Alu Polished  
Cella  
Smokey Grey



477/966  
Alu Polished  
Cella  
Coppertone

## GENERAL INFORMATION

HOMAPAL® polished aluminium is a decorative laminate with a surface material consisting of a thin aluminium layer. This aluminium layer is covered with a thin, anodised aluminium finish.

### Note:

The kraft paper core layers are impregnated with phenol-formaldehyde resin. The HOMAPAL® metal laminate consists of approx. 55% paper, 25% phenol-formaldehyde resin and 20% metal foil.

The phenol-formaldehyde resin is irreversibly chemically cross-linked and forms a cured, stable material whose properties are fundamentally different to those of the raw materials.

HOMAPAL® metal laminate is manufactured under the simultaneous application of heat (> 120°C) and a high specific pressure (> 5 MPa).



## CARE AND CLEANING

A soft, lint-free cloth and a mild cleaning agent should always be used for cleaning. Strongly alkaline, strongly acidic, or cleaning agents with abrasive components must not be used. Alternative cleaning agents should only be used after consultation with HOMAPAL Application Technology.

## PROCESSING INFORMATION:

HOMAPAL® metal laminate can be sawn, drilled or milled as with all standard laminates (HPL), whereby the use of carbide-tipped cutting tools is recommended. The standard safety directives regarding dust extraction and fire protection are to be complied with during the processing and finishing of HPL.

Due to the fact that the material has very sharp edges, gloves and safety goggles should be worn. Precautions should be taken to prevent dust during processing and local regulations must be complied with. When processing, always observe the same working direction, otherwise there will be changes in the appearance.

When cutting, the decor side should always be facing up.

## SUBSTRATE:

All standard substrates suitable for laminates are also suitable for HOMAPAL® metal laminate. It is to be ensured that the moisture content of the substrate is not higher than that of the HOMAPAL® metal laminate (see storage and conditioning).

## APPLICATION AREAS

Only use indoors and vertically. As horizontal use and use in damp rooms is only possible to a limited extent, we cannot recommend it. You can learn more details from our applications engineering department on request.



## GLUEING

Commercially available adhesives and glues such as PVAC glue, two-component adhesives (epoxy) and neoprene contact adhesives are recommended. Exception: Urea bonding adhesives are not suitable. Comply with the manufacturer processing instructions in all cases. Never use water-based adhesives when applying moisture-proof materials. The moisture in the adhesive cannot dissipate and, therefore, the adhesive bond cannot dry.

## SPECIAL NOTE FOR POLISHED ALUMINUM

When bonding HOMAPAL® polished aluminium laminates on suitable base material take care of absolute cleanliness. Particularly, when using a block press you must take care that no dust particles adhere to the lower side or back of the sandwich board; they can transfer marks to the next polished aluminium surface. Impurities in the adhesive must be avoided. In certain lighting conditions or certain light sources anodised polished aluminium surfaces may display slight interference colour variations.

Therefore HOMAPAL® polished aluminium laminates should be viewed under relevant lighting conditions prior to application. Bending radii of less than 200 mm can provoke fine hairline cracks in the surface barely detectable with the naked eye. These are a specific characteristic of anodised surfaces and do not indicate a defect.

As regards the structured polished aluminium decors, hairline cracks are part of the decor and do not affect the surface properties.

When bonding embossed laminates to base materials, it is recommendable to achieve uniform pressure by means of padding, as, when pressing directly against the heat plate, the pressure designed for the entire area will only be effective at the raised points of the embossed surface and, therefore, considerably higher (exception when bonding to frames: Here too much padding can result in frame marks on the surface).

# HOMAPAL® METAL DECORS

## TECHNICAL DATA SHEET

### ALU POLISHED CELLA



470/966  
Alu Polished  
Cella Natural



471/966  
Alu Polished  
Cella Goldtone



473/966  
Alu Polished  
Cella Tea



474/966  
Alu Polished  
Cella  
Smokey Grey



477/966  
Alu Polished  
Cella  
Coppertone

## STORAGE AND CONDITIONING



As with standard HPL products, HOMAPAL® metal laminate must also be stored in a closed storeroom protected against moisture and UV radiation. Storage should be in a standard climate, i.e. approx. 18-25°C and 50-60% relative humidity.

The panel is covered with a protective foil upon completion of the final inspection. **Our protective foil is only a transport protection.** This does not absolve you from a timely incoming inspection (prior inspection of colour, colour uniformity and other quality characteristics of the laminate). The protective foil has to be removed before further processing. The surface protected by the removable protective foil should not be exposed to light for a long time. There is a risk that the foil will become more difficult to remove. (Use top cover!) The protective foil is not impermeable to liquids.

To avoid changes to the adhesive strength of the protective foil on the panel surface, the storage temperature should not deviate from the above specified temperatures by more than  $\pm 10^\circ\text{C}$  during longer storage periods.

Laminates are to be stored fully supported and horizontal. If this is not possible, positioning at an incline of approx.  $80^\circ$  with full-surface support and an abutment on the ground to prevent slipping is recommended. The best conditioning is achieved in the room climate of the later area of application. This conditioning is recommended because materials that are processed in an excessively moist condition will tend towards expansion over time, and materials that are too dry will tend towards shrinking. All materials should be conditioned together for at least 48 hours.

Note: Always carry panels flat to avoid bends and cracks in the surface.

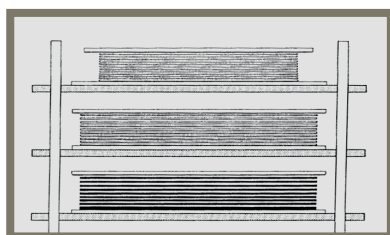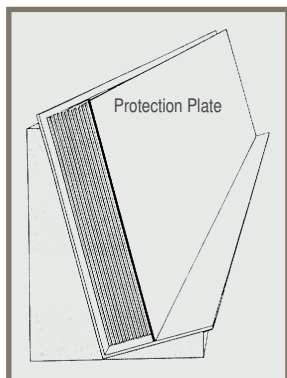

## BALANCING

Stresses always arise between two different materials that are joined together. Therefore, a substrate must be covered on both sides with materials that are subject to the same dimensional changes under the influence of heat and moisture (conditioning of all materials). This applies in particular if the finished composite panel is to be self-supporting and is not held by a rigid construction. The larger the areas to be covered, the more attention is to be paid to the choice of the backing type, a symmetrical construction and the density and rigidity of the substrate. Our experience shows that substrates of a thickness  $\leq 13$  mm are critical in terms of the flatness of the composite element.

Fundamentally, factors such as the rigidity and symmetrical construction of the substrate, uniform appliance of adhesive and press temperature, as well as the size and angle of attachment of the object have an over-proportional influence here. The best results are always achieved through the use of the same laminate from the same manufacturer on both the front and rear sides. Both sides must always be glued to the substrate with the same running or finish direction on both sides (never at right-angles to each other).

To keep costs low, the use of second-choice laminates of the same material, or special backing material without the finish quality of the top layer is recommended. The use of other materials as backing cannot be recommended - even if the physical characteristics are as close as possible to those of HOMAPAL® metal laminate - because the results can never be predicted with certainty.

## HOMAPAL LAMINATE IN THE EVENT OF FIRE?

HOMAPAL® metal laminate is difficult to set on fire and has the property of delaying the spread of flames. In the event of incomplete combustion - as with any other material - the smoke may contain toxic substances.

The same fire-fighting techniques can be used on fires involving HOMAPAL® metal laminates that are used on wood-based building materials.

# HOMAPAL® METAL DECORS

## TECHNICAL DATA SHEET

### ALU POLISHED CELLA



470/966  
Alu Polished  
Cella Natural



471/966  
Alu Polished  
Cella Goldtone



473/966  
Alu Polished  
Cella Tea



474/966  
Alu Polished  
Cella  
Smokey Grey



477/966  
Alu Polished  
Cella  
Coppertone

## FIRE AND EXPLOSION PROTECTION DATA

<b>IGNITION TEMPERATURE</b>	Approx. 400°C
<b>FLASH POINT</b>	none
<b>THERMAL DECOMPOSITION</b>	Possible above 250°C. Toxic gases (carbon monoxide, carbon dioxide) can be generated depending on the fire conditions (temperature, oxygen content, etc.).
<b>SMOKE AND TOXICITY</b>	HOMAPAL® metal laminate is classified as „s1“ - which means no / hardly any smoke generation.
<b>FLAMMABILITY</b>	HOMAPAL® metal laminate is classified as being of low flammability.
<b>EXTINGUISHING AGENT</b>	HOMAPAL® metal laminate has been assigned as Class A. Carbon dioxide, water jet or dry foam can be used to extinguish flames. Breathing apparatus and fire-protection clothing should be worn in the event of a fire.
<b>EXPLOSION HAZARD</b>	Processing, sawing, sanding, milling generates dust of class ST-1. Standard safety precautions and adequate ventilation are to be ensured.
<b>EXPLOSION LIMIT</b>	The dust concentration should be below 30 mg/m³.
<b>PROTECTION AGAINST EXPLOSION AND FIRE</b>	HOMAPAL® metal laminate should be treated in the same way as wood material in the event of explosions or fire.
<b>STORAGE AND TRANSPORT</b>	HOMAPAL® metal laminate is not classified as a hazardous substance for transport. There are no special requirements.
<b>HEALTH ASPECTS</b>	HOMAPAL® metal laminate is not classified as being hazardous to people or animals. There is no evidence of toxic or eco-toxic effects. The finish is physiologically harmless.
<b>PENTACHLOROPHENOL</b>	HOMAPAL® metal laminate does not contain PCP.
<b>MISCELLANEOUS</b>	HOMAPAL® metal laminate is not a hazardous substance within the meaning of the regulation on hazardous substances.

#### Resistance to fire:

HOMAPAL® metal laminates are flameresistant according to IMO Resolution MSC.307(88)-(FTP-Code 2010), Annex 1, Part 2\*, Part 5. The products bear the „steering wheel“ logo and the US Coast Guard Approval no. 164.112/EC0736/118447-00. \*) = not applicable.

Classification of resistance to fire as per DIN EN 13501-1:2010-01  
HOMAPAL® metal laminates: B-s1-d0.

These properties apply exclusively to the laminates. Substrates and adhesives, etc. must be assessed separately. Please refer to our comprehensive technical information for more details on this.

#### Formaldehyde:

The HOMAPAL® metal collection is tested for the emission of formaldehyde in accordance with DIN EN 717-1. The results were significantly below the limit value - if detectable at all - stipulated by the German Chemicals Prohibition Ordinance and the German Health Authority for interior spaces.

These specifications are based on our current knowledge and experience. They do not, however, exempt the processor from undertaking his own tests and examinations. A legally binding assurance of the properties or suitability for a specific purpose can not be derived from our specifications. We recommend the use of our technical advice service in the event of doubt. It is the responsibility of the processor of our products to observe any trade mark rights as well as all existing laws and regulations.

Status: August 2020

## ENVIRONMENTAL AND HEALTH ASPECTS

HOMAPAL® metal laminate is a cured and therefore inert thermosetting plastic with a metal foil. There are no migrations that affect food and therefore, contact with food is harmless. The protective anodised layer of the finish is resistant to household solvents and chemicals. The HOMAPAL® metal laminates have been tested in accordance with DIN EN 717-1 and fall significantly below - where results were detectable at all - the limit value of the German Chemical Prohibition Regulations and the guideline value of the BGA for interiors.

HOMAPAL® metal laminate is a product and not a chemical substance, therefore the REACH Regulation does not apply.